



114-A series

P.C.B SOCKET 2.54mm(0.100")

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

114-A -S S 40G

1 2 3 4 5

SERIES NO — 1


ROW TYPE: — 2
 D-DOUBLE ROW
 S-SINGLE ROW

CONTACT PLATED:
 T-ALL TIN PLATED
 G-ALL GOLD PLATED

NO.OF PINS:
 SINGLE ROW FROM 01 TO 40
 DOUBLE ROW FROM 04 TO 80

TERMINAL TYPE: — 5
 S-STRAIGHT TYPE
 R-RIGHT ANGLE TYPE

[SINGLE ROW]

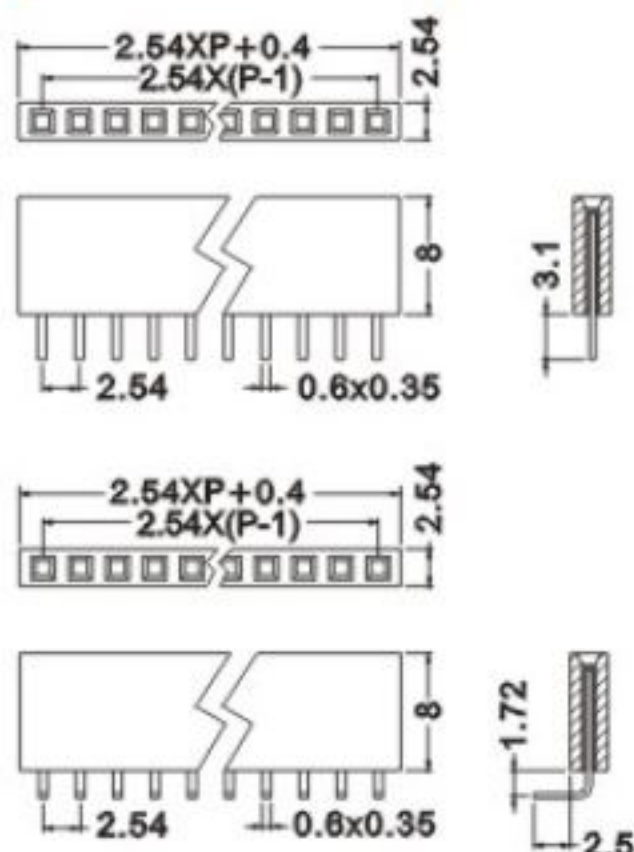

[DUAL ROW]

