

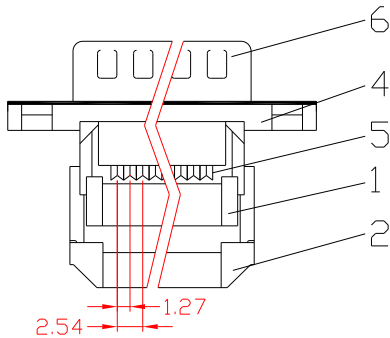


序号/RevNo.	名称/Title	文件编号/File No.
1	103中盖	QJ/XYT-11051 ~ 11054
2	103反折盖	QJ/XYT-11055 ~ 11058
3	103后塞	QJ/XYT-11059 ~ 11062
4	103M塑件主体	QJ/XYT-11063 ~ 11066
5	103M端子	QJ/XYT-11048
6	铁壳	QJ/XYT-11089 ~ 11092

Specifications:
Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 5AMP

Dielectric Withstanding
Voltage: AC 500V For 1 minute
Operating Temperature:-55℃--+105℃
Contact: Brass
Housing: PBT &30% Glass Fiber(UL 94V-0)

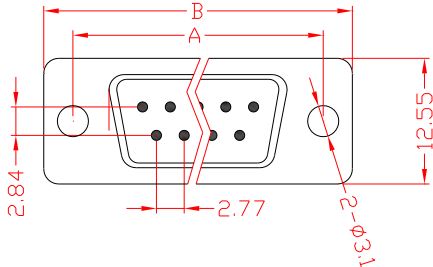

Position	A	B
9	24.99	30.81
15	33.32	39.20
25	47.04	53.10
37	63.50	69.50




设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	X. ±0.2	X." ±2"
		103-A M产品图	QJ/XYT-12007	.X ±0.1	.X" ±1"
		页序/Sheet		.XX ±0.05	.XX" ±0.5"
		备注 /Remark		.XXX ±0.01	
				单位/Units: mm	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

序号/RevNo.	名称/Title	文件编号/File No.
1	103中盖	QJ/XYT-11051 ~ 11054
2	103反折盖	QJ/XYT-11055 ~ 11058
3	103后塞	QJ/XYT-11059 ~ 11062
4	103F塑件主体	QJ/XYT-11067 ~ 11070
5	103F端子	QJ/XYT-11049
6	铁壳	QJ/XYT-11085 ~ 11088

Specifications:
Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 5AMP

Dielectric Withstanding
Voltage: AC 500V For 1 minute
Operating Temperature:-55℃--+105℃
Contact: Phosphor Bronze
Housing: PBT &30% Glass Fiber(UL 94V-0)

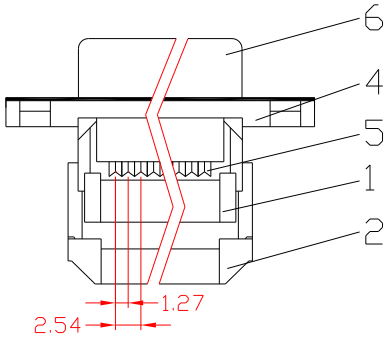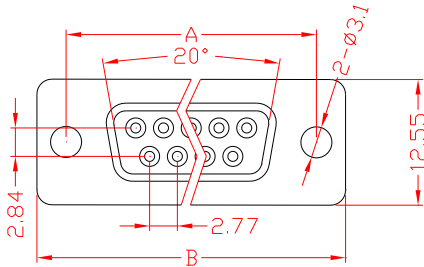

Position	A	B
9	24.99	30.81
15	33.32	39.20
25	47.04	53.10
37	63.50	69.50

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	X. ±0.2	X." ±2"
		103-A F产品图	QJ/XYT-12008	.X ±0.1	.X" ±1"
		页序/Sheet		.XX ±0.05	.XX" ±0.5"
		备注 /Remark		.XXX ±0.01	
				单位/Units: mm	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------