



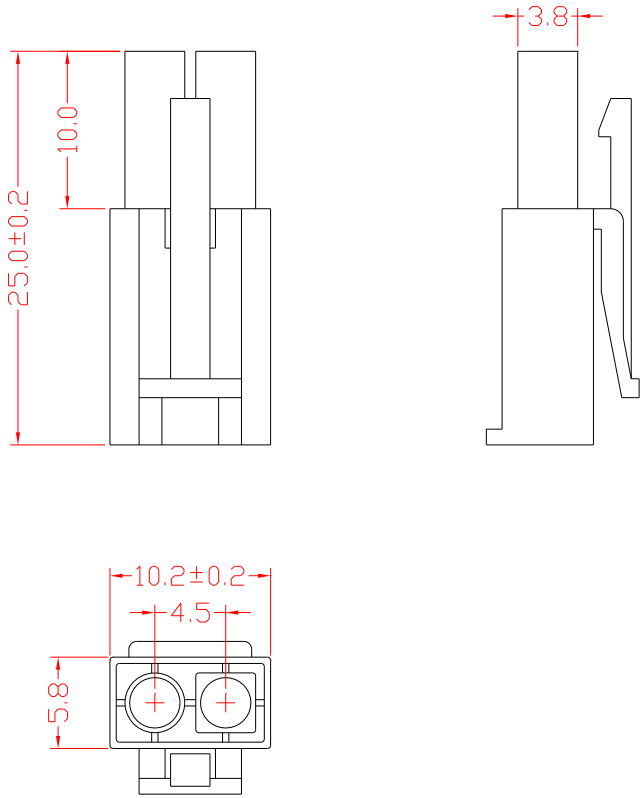
Specifications:
Contact Resistance: 10mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 300V
Current Rating: 10AMP

Dielectric Withstanding
Voltage: AC 1500V For 1 minute
Operating Temperature:-25°C--+85°C
Contact: Brass
Housing: Nylon66(UL 94V-0)

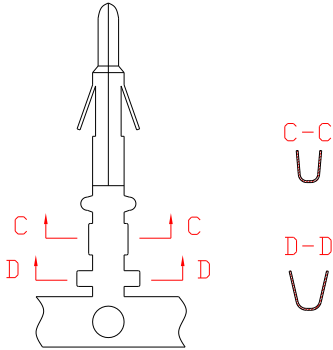


Sample								
Type	138-02M	138-03M	138-04M	138-04MN	138-06M	138-09M	138-12M	138-15M
Current rating	10A	10A	10A	10A	8A	6A	6A	6A

设计/Designed by	绘图/Drawing by	审核/checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	x. ±0.2	x.' ±2"
		138M产品图	QJ/XYT-12088	.x ±0.1	.x' ±1"
			页序/Sheet		.xx ±0.05
		备注 /Remark		波兰	



Specifications:
Contact Resistance: 10mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 300V
Current Rating: 10AMP

Dielectric Withstanding
Voltage: AC 1500V For 1 minute
Operating Temperature:-25°C--+85°C
Contact: Phosphor Bronze
Housing: Nylon66(UL 94V-0)

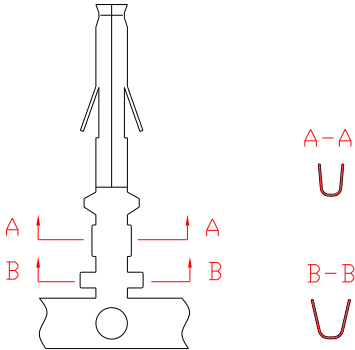

Sample								
Type	138-02F	138-03F	138-04F	138-04FN	138-06F	138-09F	138-12F	138-15F
Current rating	10A	10A	10A	10A	8A	6A	6A	6A

设计/Designed by	绘图/Drawing by	审核/checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名 /Title	文件编号/File No.	x. ±0.2	x.' ±2"
		138F产品图	QJ/XYT-12089	.x ±0.1	.x' ±1"
			页序 /sheet	.xx ±0.05	.xx' ±0.5"
		备注 /Remark		波兰	单位/units: mm