

# 142 series

## L6.2 TYPE CONNECTOR

6.20mm(0.244" )


### Specifications:

Contact Resistance: 10mΩ max  
 Insulator Resistance: 1000MΩ min  
 Dielectric Strength: AC 1500V For 1 minute  
 Current Rating: 13-8AMP  
 Voltage Rating: 300V/AC  
 Pitch: 6.2mm


### Material:

Housing: Nylon UL94V-0  
 Contact: Phosphor Bronze(Tin Plated)


### How To Order

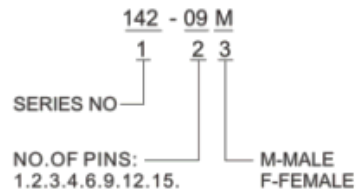

### [ MALE ]



### [ FEMALE ]



Sample									
Type	142-01M 142-01F	142-02M 142-02F	142-03M 142-03F	142-04MN 142-04FN	142-04M 142-04F	142-06M 142-06F	142-09M 142-09F	142-12M 142-12F	142-15M 142-15F
Current rating	13A	13A	11A	11A	11A	8A	8A	8A	8A