



**HAHN - Elektrobau GmbH & Co. KG**

Bellersheimerstraße 45  
35410 Hungen  
Germany

phone: +49 (0) 6402/808-0  
fax: +49 (0) 6402/808-60  
email: [info@hahn-trafo.de](mailto:info@hahn-trafo.de)

**Data sheet: BV 201 0136**

Size 1 a: height 15 mm

Type BV 201...


0,35 VA

shipping unit per box: **50 pcs.** / temperature class: **ta 70/B** / weight: **approx. 25g**

- absolutely short circuit proof
- **excellent function at thermal changes, vacuum casted**
- maximum safety and long-term durability
- **with VDE-, ENEC 10-, UL-, and CSA certificates**
- minimum size, maximum capacity
- **self-extinguishing cast housing and sealing material**
- individually tested with certificate

Article no. BV	Output ta 70°C/B	prim.V	Connecting pins	Operating point sec. $\pm 5\%$	Connecting pins	No-load voltage V $\pm 5\%$
BV 201 0136	0,35	230	1-4	9 V 39 mA	6-7	14,4

**Certificates**

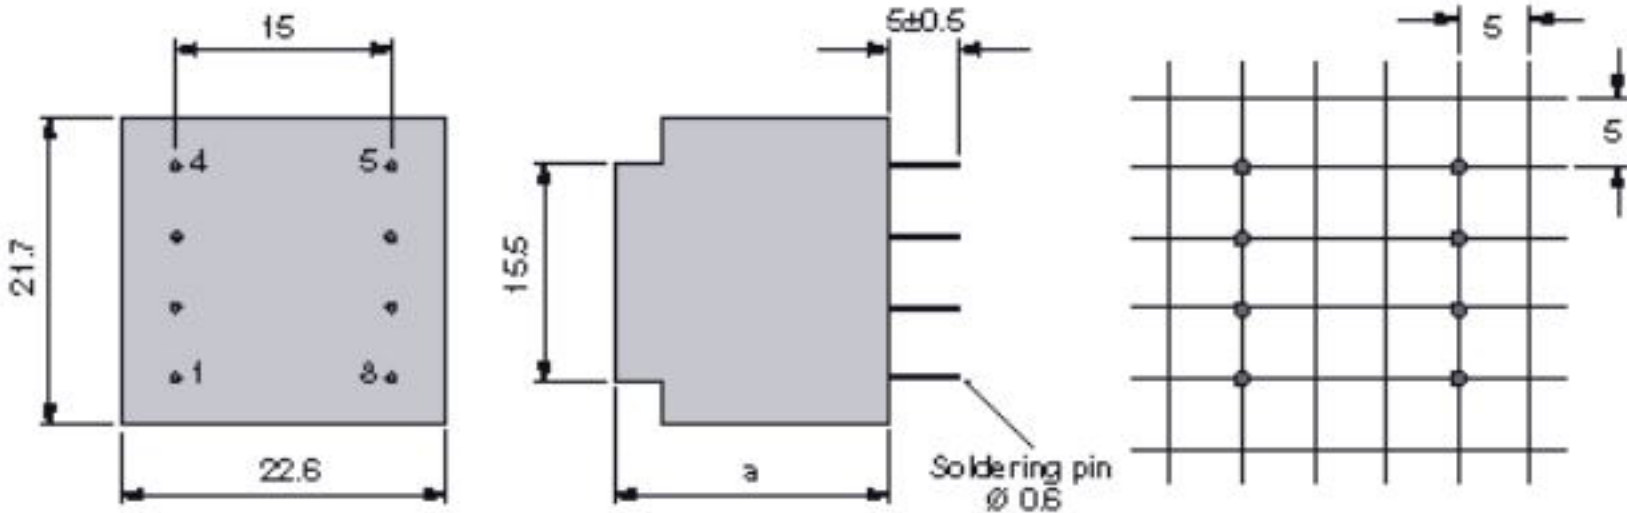

Dimensions with no indication of tolerances:  $\pm 0,3$  mm